



# XTR™ Airless Spray Guns

Rugged Design to Handle the Toughest Protective Coatings



## Built for Extreme Conditions

- Compact design allows for easy maneuverability
- XTR-5: maximum fluid pressure of 5000 (345 bar, 34.5 MPa)
- XTR-7: maximum fluid pressure of 7250 (500 bar, 50 MPa)
- Variety of handle and trigger options
- High quality materials and construction

PROVEN QUALITY. LEADING TECHNOLOGY.



## Genuine Graco Fluid Hoses Make the Difference

### Xtreme-Duty™ 4500 psi (310 bar) High Pressure Hose

| Part # | Length          | Hose Diameter    | Female NPSM |
|--------|-----------------|------------------|-------------|
| H42503 | 3 ft (0.9 m)    | 1/4 in (6.4 mm)  | 1/4 in      |
| H42506 | 6 ft (1.8 m)    | 1/4 in (6.4 mm)  | 1/4 in      |
| H42510 | 10 ft (3.0 m)   | 1/4 in (6.4 mm)  | 1/4 in      |
| H42525 | 25 ft (7.6 m)   | 1/4 in (6.4 mm)  | 1/4 in      |
| H42550 | 50 ft (15.2 m)  | 1/4 in (6.4 mm)  | 1/4 in      |
| H4251X | 100 ft (30.5 m) | 1/4 in (6.4 mm)  | 1/4 in      |
| H43803 | 3 ft (0.9 m)    | 3/8 in (9.5 mm)  | 3/8 in      |
| H43806 | 6 ft (1.8 m)    | 3/8 in (9.5 mm)  | 3/8 in      |
| H43810 | 10 ft (3.0 m)   | 3/8 in (9.5 mm)  | 3/8 in      |
| H43825 | 25 ft (7.6 m)   | 3/8 in (9.5 mm)  | 3/8 in      |
| H43850 | 50 ft (15.2 m)  | 3/8 in (9.5 mm)  | 3/8 in      |
| H4381X | 100 ft (30.5 m) | 3/8 in (9.5 mm)  | 3/8 in      |
| H45010 | 10 ft (3.0 m)   | 1/2 in (12.7 mm) | 1/2 in      |
| H45025 | 25 ft (7.6 m)   | 1/2 in (12.7 mm) | 1/2 in      |
| H45050 | 50 ft (15.2 m)  | 1/2 in (12.7 mm) | 1/2 in      |
| H4501X | 100 ft (30.5 m) | 1/2 in (12.7 mm) | 1/2 in      |

### Xtreme-Duty 5600 psi (386 bar) High Pressure Hose

| Part # | Length          | Hose Diameter    | Female NPSM |
|--------|-----------------|------------------|-------------|
| H52503 | 3 ft (0.9 m)    | 1/4 in (6.4 mm)  | 1/4 in      |
| H52506 | 6 ft (1.8 m)    | 1/4 in (6.4 mm)  | 1/4 in      |
| H52510 | 10 ft (3.0 m)   | 1/4 in (6.4 mm)  | 1/4 in      |
| H52525 | 25 ft (7.6 m)   | 1/4 in (6.4 mm)  | 1/4 in      |
| H52550 | 50 ft (15.2 m)  | 1/4 in (6.4 mm)  | 1/4 in      |
| H5251X | 100 ft (30.5 m) | 1/4 in (6.4 mm)  | 1/4 in      |
| H53803 | 3 ft (0.9 m)    | 3/8 in (9.5 mm)  | 3/8 in      |
| H53806 | 6 ft (1.8 m)    | 3/8 in (9.5 mm)  | 3/8 in      |
| H53810 | 10 ft (3.0 m)   | 3/8 in (9.5 mm)  | 3/8 in      |
| H53825 | 25 ft (7.6 m)   | 3/8 in (9.5 mm)  | 3/8 in      |
| H53850 | 50 ft (15.2 m)  | 3/8 in (9.5 mm)  | 3/8 in      |
| H5381X | 100 ft (30.5 m) | 3/8 in (9.5 mm)  | 3/8 in      |
| H55010 | 10 ft (3.0 m)   | 1/2 in (12.7 mm) | 1/2 in      |
| H55025 | 25 ft (7.6 m)   | 1/2 in (12.7 mm) | 1/2 in      |
| H55050 | 50 ft (15.2 m)  | 1/2 in (12.7 mm) | 1/2 in      |
| H5501X | 100 ft (30.5 m) | 1/2 in (12.7 mm) | 1/2 in      |

### Xtreme-Duty 7250 psi (500 bar) High Pressure Hose

| Part # | Length          | Hose Diameter    | Female NPSM |
|--------|-----------------|------------------|-------------|
| H72503 | 3 ft (0.9 m)    | 1/4 in (6.4 mm)  | 1/4 in      |
| H72506 | 6 ft (1.8 m)    | 1/4 in (6.4 mm)  | 1/4 in      |
| H72510 | 10 ft (3.0 m)   | 1/4 in (6.4 mm)  | 1/4 in      |
| H72525 | 25 ft (7.6 m)   | 1/4 in (6.4 mm)  | 1/4 in      |
| H72550 | 50 ft (15.2 m)  | 1/4 in (6.4 mm)  | 1/4 in      |
| H7251X | 100 ft (30.5 m) | 1/4 in (6.4 mm)  | 1/4 in      |
| H73803 | 3 ft (0.9 m)    | 3/8 in (9.5 mm)  | 3/8 in      |
| H73806 | 6 ft (1.8 m)    | 3/8 in (9.5 mm)  | 3/8 in      |
| H73810 | 10 ft (3.0 m)   | 3/8 in (9.5 mm)  | 3/8 in      |
| H73825 | 25 ft (7.6 m)   | 3/8 in (9.5 mm)  | 3/8 in      |
| H73850 | 50 ft (15.2 m)  | 3/8 in (9.5 mm)  | 3/8 in      |
| H7381X | 100 ft (30.5 m) | 3/8 in (9.5 mm)  | 3/8 in      |
| H75010 | 10 ft (3.0 m)   | 1/2 in (12.7 mm) | 1/2 in      |
| H75025 | 25 ft (7.6 m)   | 1/2 in (12.7 mm) | 1/2 in      |
| H75050 | 50 ft (15.2 m)  | 1/2 in (12.7 mm) | 1/2 in      |
| H7501X | 100 ft (30.5 m) | 1/2 in (12.7 mm) | 1/2 in      |

# Lightweight and Ergonomic

## Technical Specifications

|                                |  |
|--------------------------------|--|
| Maximum fluid working pressure | XTR-5: 5000 psi (345 bar, 34.5 MPa)<br>XTR-7: 7250 psi (500 bar, 50 MPa)   |
| Fluid orifice                  | 0.090 in (2.3 mm)  |
| Fluid inlet                    | 1/4 npsm   |
| Maximum fluid temperature      | 160° F (71° C)   |
| Sound pressure                 | 84.3dB(A)*   |
| Sound power                    | 95.7dB(A)*   |
| Dimensions                     | XTR-5: Weight 14.5 oz (411 g), Length 4.35 in (111 mm), Height 7.1 in (180 mm)<br>XTR-7: Weight 24 oz (688 g), Length 4.35 in (111 mm), Height 7.1 in (180 mm) |
| Wetted parts                   | Aluminum, stainless steel, polyethylene, polyurethane, polypropylene, nylon, acetal, carbide, solvent-resistant O-rings  |
| Instruction Manual             | 312145   |

\* Results are maximum readings taken at 6000 psi (414 bar, 41 MPa), with GHD519 tip, using water. Sound power level was tested to ISO 9614-2.

## Ordering Information

### XTR-5 Airless Spray Gun

|   |
|---|
| Maximum working pressure: 5000 psi (345 bar, 34.5 MPa)          |
| XTR500 1" round handle, four-finger trigger, no tip             |
| XTR501 1" round handle, four-finger trigger, flat tip*          |
| XTR502 Oval insulated handle, four-finger trigger, XHD RAC tip* |
| XTR503 Oval insulated handle, two-finger trigger, XHD RAC tip*  |
| XTR504 1" round handle, four-finger trigger, XHD RAC tip*       |
| XTR505 1" round handle, two-finger trigger, XHD RAC tip*        |

### XTR-7 Airless Spray Gun

|   |
|---|
| Maximum working pressure: 7250 psi (500 bar, 50.0 MPa)          |
| XTR700 Round handle, four-finger trigger, no tip                |
| XTR701 Round handle, four-finger trigger, flat tip*             |
| XTR702 Oval insulated handle, four-finger trigger, XHD RAC tip* |
| XTR703 Oval insulated handle, two-finger trigger, XHD RAC tip*  |
| XTR704 Round handle, four-finger trigger, XHD RAC tip*          |
| XTR705 Round handle, two-finger trigger, XHD RAC tip*           |

\*Includes 519 tip

### Accessories

|   |   |
|---|---|
| 287450 2-finger trigger kit                                     | 246297 180° spray nozzle, 7/8-14 UNC-2B, 7250 psi (500 bar, 50 MPa) |
| 287449 4-finger round trigger kit                               | 248837 Gun repair kit, includes gasket, needle and seat             |
| 287451 4-finger oval insulation trigger kit                     | XHD001 XHD RAC Guard  |
| 246294 10 in (254 mm) gun extension, 7250 psi (500 bar, 50 MPa) | 287032 Filter, 60 mesh, included in every gun                       |
| 246295 15 in (380 mm) gun extension, 7250 psi (500 bar, 50 MPa) | 287033 Filter, 100 mesh   |
| 246296 18 in (457 mm) gun extension, 7250 psi (500 bar, 50 MPa) | 287034 Filter, 60 and 100 mesh combination                          |

## Quality Features for Ultimate Coatings Results

### Needle Assembly and XHD™ RAC® SwitchTip™

- Exceptional life, pattern and finish
- Great for high solids coatings
- Factory set needle needs no adjustments

### Easy Out™ Gun Filter


- Reduces tip plugs
- Eliminates collapsed filters
- Provides more filtration area

### Variety of Handle and Trigger Options

- 2-and 4-finger trigger options
- Oval-insulated or round handle
- Lightweight trigger pull

### EasyGlide™ Swivel

- Allows easier gun movement under high pressure

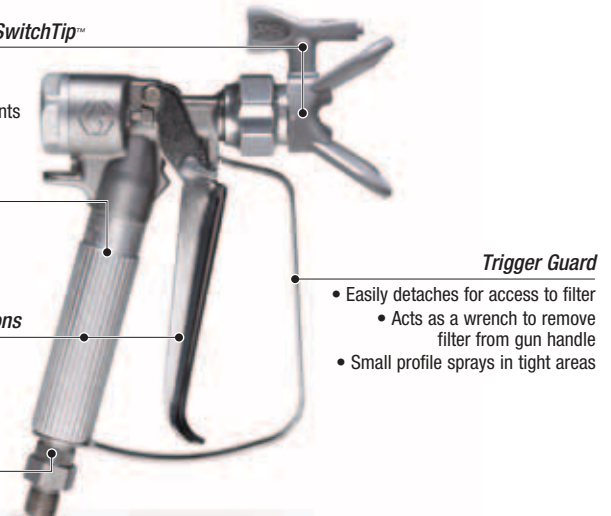

### Trigger Guard

- Easily detaches for access to filter
- Acts as a wrench to remove filter from gun handle
- Small profile sprays in tight areas